
340-355W

出力範囲

17.5%

最大変換効率


0~+5W

出力許容公差

	340	345	350	355
	37.5	37.7	37.9	38.1
	9.06	9.15	9.23	9.32
	46.2	46.4	46.7	47.0
	9.53	9.62	9.71	9.81
	16.8	17.0	17.3	17.5

	257	261	265	269
	35.5	35.7	35.9	36.1
	7.24	7.31	7.37	7.45
	43.5	43.7	44.0	44.2
	7.69	7.76	7.83	7.91

	多結晶
	144 セル (6 × 24)
	26.0 kg
	EVA

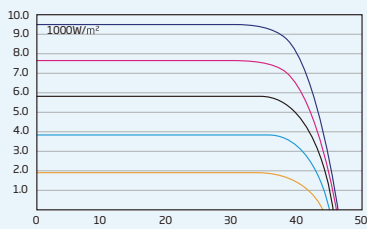

	41°C (±3°C)
	-0.38%/°C
	-0.31%/°C
	0.05%/°C

	-40~+85°C
	1500V DC (IEC)
	1500V DC (UL)
	20A