


TALLMAX^M

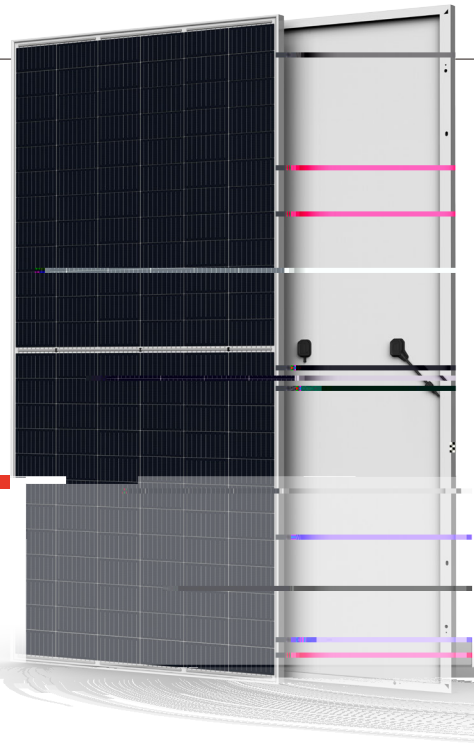

390-415W
出力範囲

20.4%
最大変換効率

0~+5W
出力許容公差





ISO 9001
Certified
Quality Management System
www.hor-solar.com/iso-cert



| | |
|------|------|
| 390 | 395 |
| 19.2 | 19.4 |

| | |
|--|--|
| | |
| | |
| | |
| | |

| | |
|--|-----------------|
| | 単結晶 |
| | 144 セル (6 × 24) |
| | EVA |
| | ホワイト |
| | |
| | |
| | |
| | |
| | |

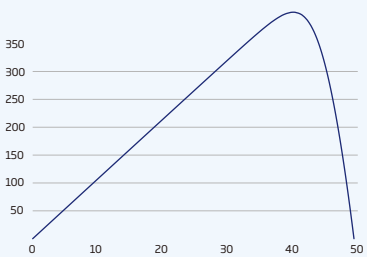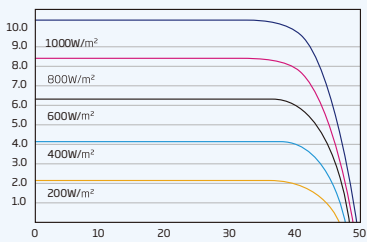

| |
|-------------|
| 41 C (±3 C) |
| -0.36%/C |
| -0.26%/C |
| 0.04%/C |

| |
|----------------|
| -40~+85 C |
| 1500V DC (IEC) |
| 1500V DC (UL) |

| |
|--|
| |
| |

| |
|--|
| |
| |